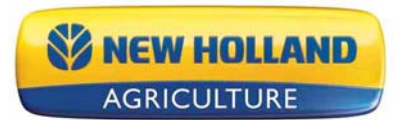


Specifications

Model	BR7090
Bale Size	
Diameter, in. (cm)	36-72 (91.5-182)
Width, in. (cm)	61.5 (156)
Weight, lbs. (kg)	500-2200 (227-998)
Density pressure	Adjustable
Baler Dimensions and Weight	
Overall width, in (cm)	111 (282)
Overall length (tailgate closed), in. (cm)	190 (483)
Overall length (tailgate open), in. (cm)	200 (508)
Overall height (tailgate closed), in. (cm)	124 (315)
Overall height (tailgate open), in. (cm)	170 (432)
Shipping weight, lbs. (kg)	6920 (3139)
XtraSweep™ Pickup	
Overall width, in. (cm)	94 (240)
Width tine-to-tine, in. (cm)	82 (207)
Width flare-to-flare, in. (cm)	90 (228)
Tine spacing, in. (cm)	2.6 (7)
Tine bars	5
Number of tines	160
Reel diameter, in. (cm)	12 (31)
Pickup protection	Shearbolt
Bale Forming Chamber	
Floor roll, in. (cm)	12 (31)
Forming rolls, in. (cm)	3 rolls, 10 (25)
Stripper roll	Embossed surface
Starter roll, in. (cm)	7 (17)
Steel looped sledge follower roll	NA
Tailgate nose roll	NA
Rubber backwrap roll	NA
Belts	
Number of belts	8
Width, in. (cm)	7 (18)
Length, in. (cm)	421 (1068)
Surface	Mini-rough top
Endless belts	Optional
Twine System	
Twine application	Dual pivoting arms
Twine control	Automatic
Twine storage capacity	6 balls
EdgeWrap™	
Net wrap	Available

**Bale Forming Indicators**

Bale size	Standard
Driving gauges	Standard
Twine movement	Standard
Twine arm position	Standard
Bale counter	Standard
Bale ejector	Standard
Hydraulic pressure gauge	Standard
Tailgate latch	Standard

Tractor Requirements

PTO hp (minimum), hp (kW)	80 (60)
PTO speed (rpm)	540/1000
PTO protection	Slip clutch
Hydraulic remote requirement	1-2